


[Apr-2022 H12-311 Dumps are Available for Instant Access using VCEPrep [Q69-Q92]

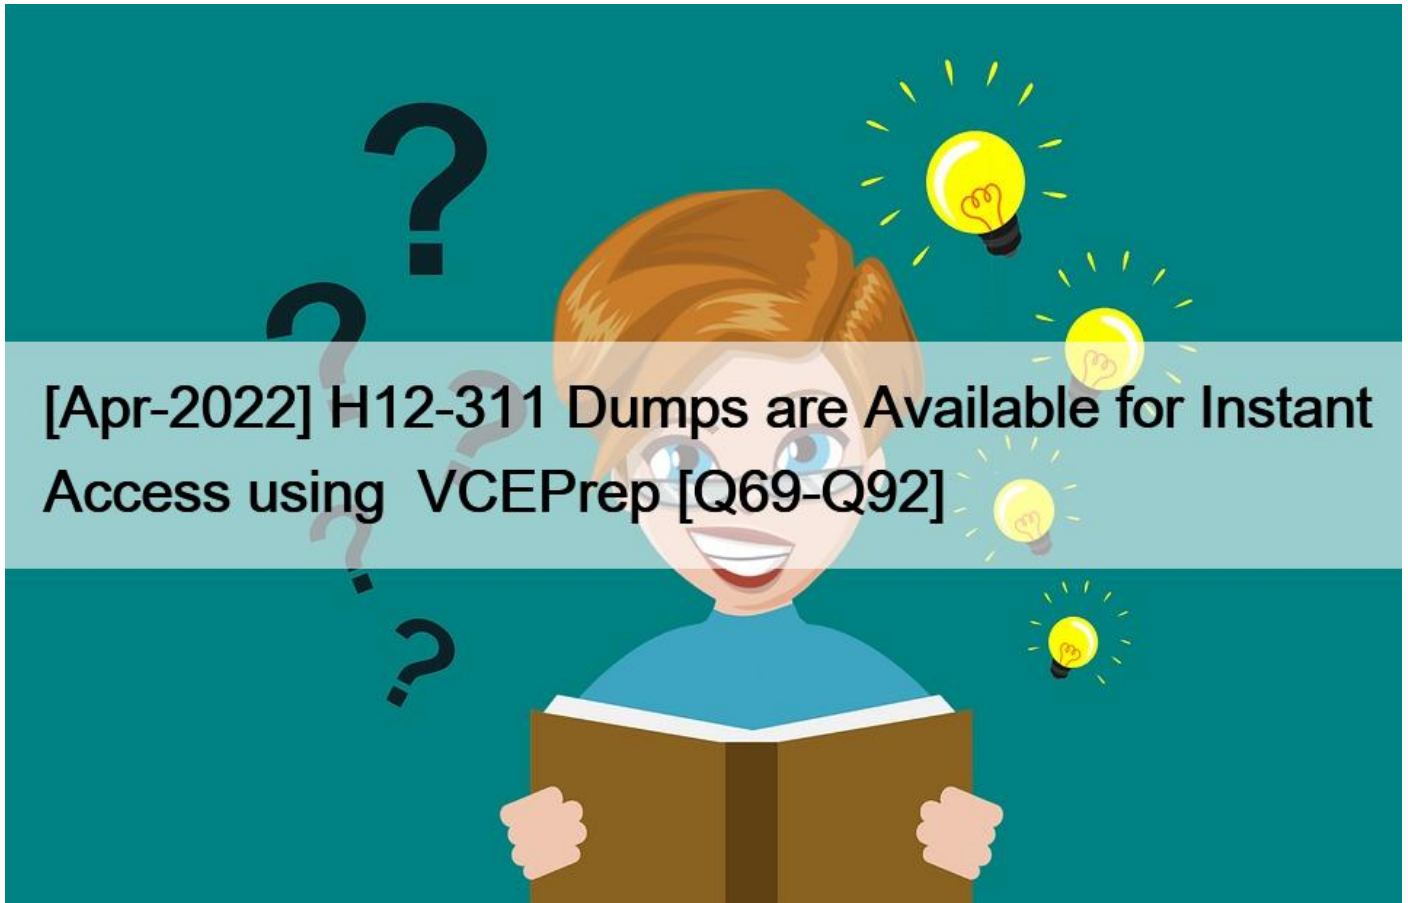

[Apr-2022] H12-311 Dumps are Available for Instant Access using VCEPrep [Q69-Q92]

[Apr-2022] H12-311 Dumps are Available for Instant Access using VCEPrep  
H12-311 Dumps 2022 - New Huawei H12-311 Exam Questions

**NO.69** If the AP's transmit power is 1mW, it is converted to dBm and then dBm.

- \* 20
- \* 1
- \* 0
- \* 10

**NO.70** The AP or AC performing the connectivity test must be online.

- \* True
- \* False

**NO.71** The following service models can provide end-to-end QoS services, but the scalability is not good.

- \* Best Effort model
- \* IntServ model
- \* FIFO model
- \* DiffServ model

**NO.72** There are many video conferences in large companies, and QoS generally adopts the service model.

- \* Best Effort model
- \* IntServ model
- \* FIFO model
- \* DiffServ model

**NO.73** When deploy AP on several floors of a building, which of the following factors are needed to pay attention to? (Multiple Choice)

- \* the material of the wall
- \* other interfering signals
- \* in order not to affect beautiful, AP should be hidden in the ceiling
- \* unified planning channel

**NO.74** If an AP has been added offline, the AP can go online directly without authentication.

- \* True
- \* False

**NO.75** What are the upgrade modes of Huawei Wireless AP? (Multiple Choice)

- \* ac-mode
- \* ap-mode
- \* ftp-mode
- \* sftp-mode

**NO.76** Which algorithm is used for CCMP encryption?

- \* RC4
- \* AES
- \* SMS4
- \* Michael

**NO.77** The conditions for switching triggers are generally set (Select 2 Answers).

- \* Start the switch after the STA reaches a certain distance from the original AP.
- \* Set the signal strength ratio between the current AP and the neighbor AP, and switch to the threshold.
- \* Check the packet loss rate and start switching when the packet loss rate reaches a certain value.
- \* Start the switch when the network speed is very slow when it is associated with the original AP.

**NO.78** What is the name of the first radio communication network based on packet technology?

- \* INTERNET
- \* ARPANet
- \* ALOHNET
- \* NSFnet

**NO.79** Which of the following is wireless LAN standards originally formulated by IEEE?

- \* IEEE 802.11
- \* IEEE 802.10
- \* IEEE 802.12
- \* IEEE 802.16

**NO.80** Which of the following is the command to restart the AC6605?

- \* <Quidway> reload

- \* <Quidway> reboot
- \* [Quidway]reload
- \* [ Quidway] reboot

**NO.81** For outdoor WLAN coverage, the following statement is correct (Select 3 Answers).

- \* The higher the antenna gain, the stronger the antenna directivity and the weaker the radiation gain directly below the antenna.
- \* The feeder interface must match the selected antenna
- \* The length of the feeder must not exceed 2 meters.
- \* Outdoor antennas should not blindly pursue high gain

**NO.82** The following description of the splitter and coupler is correct .

- \* Power splitter and coupler are equal power allocation
- \* Power splitter is equal power distribution, coupler is unequal power distribution
- \* Power splitter is unequal power distribution, coupler is equal power distribution
- \* Power splitter and coupler are unequal power distribution

**NO.83** What are the QoS service models (Select 3 Answers).

- \* Best Effort model
- \* IntServ model
- \* FIFO model
- \* DiffServ model

**NO.84** The algorithm used for CCMP encryption is .

- \* RC4
- \* AES
- \* SMS4
- \* Michael

**NO.85** What is the maximum number of APs that can be managed by the ACU board of the Huawei plug-in controller?

- \* 1024
- \* 256
- \* 512
- \* 128

**NO.86** If the interface of the switch is enabled with PoE, only those POE powered devices can be connected to these interfaces.

- \* True
- \* False

**NO.87** If the forwarding mode of an enterprise wireless network is direct forwarding, the Fit AP can convert the 802.11 data packet into an Ethernet packet, and then encapsulate the packet into a CAPWAP encapsulation and transmit the data packet to the AC through the CAPWAP tunnel.

- \* True
- \* False

**NO.88** How many management nodes can be supported by eSight standard edition?

- \* 60
- \* 2000
- \* 5000
- \* 20000

**NO.89** Which of the following statement is correct about WDS? (Multiple Choice)

- \* Two independent local area network (LAN) via wireless bridge connection, and provides data transmission between them
- \* WDS default to 2.4 GHz frequency band as bridge frequency band
- \* Good extensibility, and without laying a new cable connection and deploy more AP
- \* Huawei indoor AP does not support function of WDS

**NO.90** After the wireless user connects to the wireless signal point, the IP address cannot be obtained. What are the possible reasons? (Multiple Choice)

- \* DHCP server is not configured in the VLAN where the user is located.
- \* The wrong service vlan is configured.
- \* User specified authentication password is incorrect
- \* MAC address of the user device has been blacklisted.

**NO.91** What are the mandatory standards for wireless LAN security in China?

- \* WiFi
- \* WAPI
- \* WLAN
- \* WiMAX

**NO.92** The electrical performance indicators of the antenna include (Select 3 Answers).

- \* Gain
- \* Lobe width
- \* Power size
- \* Polarization mode

**Huawei H12-311 Exam Practice Test Questions:** <https://www.vceprep.com/H12-311-latest-vce-prep.html>