Dec-2022 Free 300-715 Test Questions Real Practice Test Questions [Q26-Q41



Dec-2022 Free 300-715 Test Questions Real Practice Test Questions 300-715 Dumps Updated Dec 09, 2022 WIith 210 Questions

NO.26 In which two ways can users and endpoints be classified for TrustSec?

(Choose Two.)

- * VLAN
- * SXP
- * dynamic
- * QoS
- * SGACL

NO.27 An administrator for a small network is configuring Cisco ISE to provide dynamic network access to users. Management needs Cisco ISE to not automatically trigger a CoA whenever a profile change is detected. Instead, the administrator needs to verify the new profile and manually trigger a CoA.

What must be configuring in the profiler to accomplish this goal?

* Port Bounce

This page was exported from - <u>Latest Exam Prep</u> Export date: Sat Sep 21 13:57:19 2024 / +0000 GMT

- * No CoA
- * Session Query
- * Reauth

https://ciscocustomer.lookbookhq.com/iseguidedjourney/ISE-profiling-policies

NO.28 An engineer is working with a distributed deployment of Cisco ISE and needs to configure various network probes to collect a set of attributes from the used to accomplish this task?


- * policy service
- * monitoring
- * pxGrid
- * primary policy administrator

NO.29 An administrator is manually adding a device to a Cisco ISE identity group to ensure that it is able to access the network when needed without authentication Upon testing, the administrator notices that the device never hits the correct authorization policy line using the condition EndPoints LogicalProfile EQUALS static_list Why is this occurring?

- * The dynamic logical profile is overriding the statically assigned profile
- * The device is changing identity groups after profiling instead of remaining static
- * The logical profile is being statically assigned instead of the identity group
- * The identity group is being assigned instead of the logical profile

NO.30 An organization wants to implement 802.1X and is debating whether to use PEAP-MSCHAPv2 or PEAP-EAP-TLS for authentication. Drag the characteristics on the left to the corresponding protocol on the right.



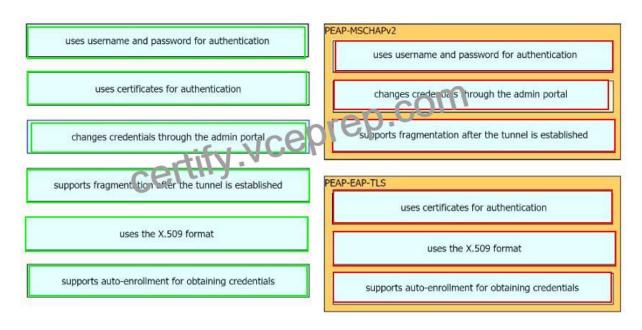

NO.31 An administrator is attempting to replace the built-in self-signed certificates on a Cisco ISE appliance. The CA is requesting some information about the appliance in order to sign the new certificate. What must be done in order to provide the CA this information?

- * Install the Root CA and intermediate CA.
- * Generate the CSR.
- * Download the intermediate server certificate.
- * Download the CA server certificate.

NO.32 Refer to the exhibit Which switch configuration change will allow only one voice and one data endpoint on each port?

- * Multi-auth to multi-domain
- * Mab to dot1x
- * Auto to manual
- * Multi-auth to single-auth

Reference:

https://community.cisco.com/t5/network-access-control/cisco-ise-multi-auth-or-multi-host/m-p/3750907

NO.33 What is the condition that a Cisco ISE authorization policy cannot match?

- * company contact
- * custom
- * time
- * device type
- * posture

NO.34 An administrator is configuring a Cisco ISE posture agent in the client provisioning policy and needs to ensure that the posture policies that interact with clients are monitored, and end users are required to comply with network usage rules Which two resources must be added in Cisco ISE to accomplish this goal? (Choose two)

- * AnyConnect
- * Supplicant
- * Cisco ISE NAC
- * PEAP

* Posture Agent

Reference:

https://www.cisco.com/c/en/us/td/docs/security/vpn_client/anyconnect/anyconnect40/administration/guide/b_AnyConnect_Administrator_Guide_4-0/configure-posture.html

 $https://www.cisco.com/c/en/us/td/docs/security/ise/2-4/admin_guide/b_ISE_admin_guide_24/m_configure_client_provisioning.html\\ \#task_D1C2E8ECE1D54D259C01BCBF0A5822F1$

NO.35 What must be configured on the WLC to configure Central Web Authentication using Cisco ISE and a WLC?

- * Set the NAC State option to SNMP NAC.
- * Set the NAC State option to RADIUS NAC.
- * Use the radius-server vsa send authentication command.
- * Use the ip access-group webauth in command.

NO.36 Which port does Cisco ISE use for native supplicant provisioning of a Windows laptop?

- * TCP 8905
- * TCP 8909
- * TCP 443
- * UDP 1812


Section: Endpoint Compliance


Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_010101.html

NO.37 An administrator is migrating device administration access to Cisco ISE from the legacy TACACS+ solution that used only privilege 1 and 15 access levels. The organization requires more granular controls of the privileges and wants to customize access levels 2-5 to correspond with different roles and access needs. Besides defining a new shell profile in Cisco ISE. what must be done to accomplish this configuration?


- * Enable the privilege levels in Cisco ISE
- * Enable the privilege levels in the IOS devices.
- * Define the command privileges for levels 2-5 in the IOS devices
- * Define the command privileges for levels 2-5 in Cisco ISE

NO.38 Drag the Cisco ISE node types from the left onto the appropriate purposes on the right.

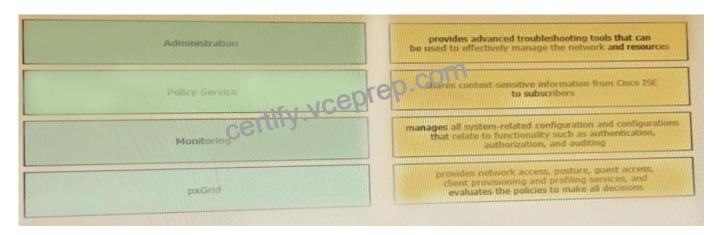

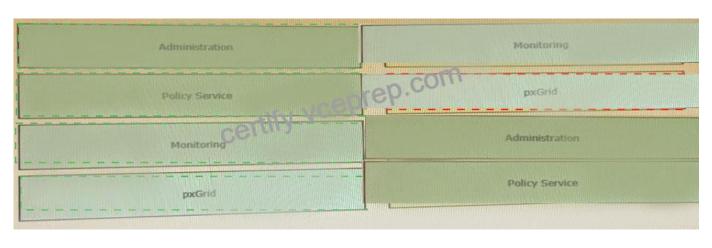

Explanation

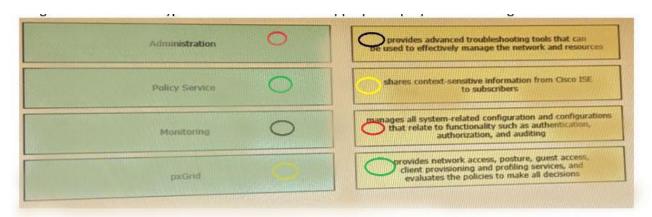

certify.vceprep.com


Monitoring= provides advanced monitoring and troubleshooting tools that you can use to effectively manage your network and resources Policy Service= provides network access, posture, guest access, client provisioning, and profiling services.

This persona evaluates the policies and makes all the decisions.

Administration= manages all system-related configuration and configurations that relate to functionality such as authentication, authorization, auditing, and so on pxGrid= shares context-sensitive information from Cisco ISE to subscribers

https://www.cisco.com/c/en/us/td/docs/security/ise/1-4/admin_guide/b_ise_admin_guide_14/b_ise_admin_guide

NO.39 Drag the descriptions on the left onto the components of 802.1X on the right.

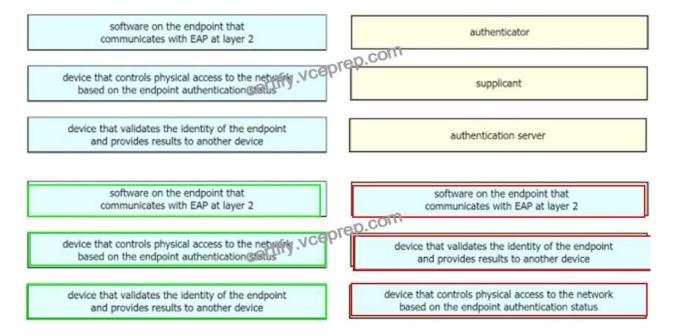

NO.40 An engineer is enabling a newly configured wireless SSID for tablets and needs visibility into which other types of devices are connecting to it. What must be done on the Cisco WLC to provide this information to Cisco ISE9

- * enable IP Device Tracking
- enable MAC filtering
- * enable Fast Transition
- * enable mDNS snooping

NO.41 Which two ports must be open between Cisco ISE and the client when you configure posture on Cisco ISE? (Choose two).

- * TCP 8443
- * TCP 8906
- * TCP 443
- * TCP 80
- * TCP 8905

This page	was exported from -	Latest Exam	Prep
	Sat Sep 21 13:57:21 2024		

More about 300-715 Evaluation The Cisco 300-715 test is categorized among other concentration tests where you only have to pass one. You select and take it after clearing the core exam called 350-701. With exam 300-715, each candidate has 1.5 hours to comprehensively answer all the questions presented to him or her. Listed below are the exam domains: - BYOD;

- Profiler;- Architecture & deployment;

Please note, other topics might be covered in the final exam but the above-listed are the commonly tested areas. If you intend to sit for 300-715 exam, enroll in the 'Implementing and Configuring Cisco ISE' course to help you prepare. Study guides also make great sources of information about the real test.

View All 300-715 Actual Free Exam Questions Updated: https://www.vceprep.com/300-715-latest-vce-prep.html]