


## Get Latest Feb-2023 Real DEP-3CR1 Exam Questions and Answers FREE [Q30-Q45]

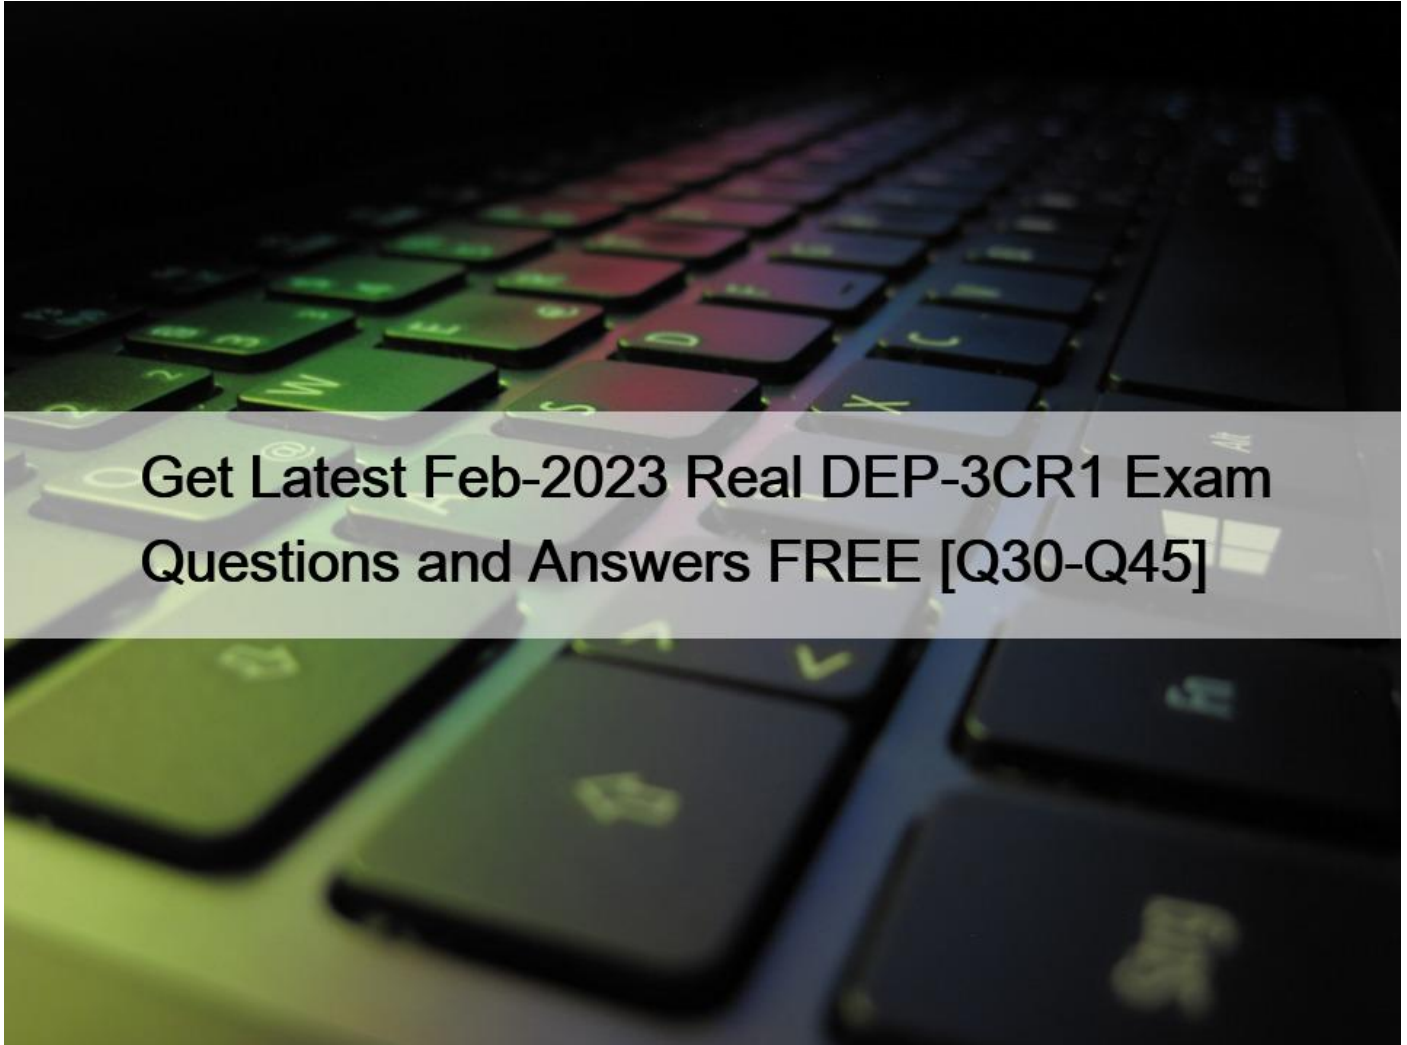

### Get Latest Feb-2023 Real DEP-3CR1 Exam Questions and Answers FREE Truly Beneficial For Your EMC Exam (Updated 56 Questions) NEW QUESTION 30

What must be considered when planning and implementing a secure Cyber Recovery Vault solution?

- \* Production environment can use resources from Vault environment
- \* Production environment is used to run the Cyber Recovery Management Host
- \* Vault and Production infrastructure must be managed by NOC
- \* Vault infrastructure is completely isolated from the Production infrastructure

### NEW QUESTION 31

Which are components of PowerProtect Cyber Recovery?

- \* NetWorker, PowerProtect Data Manager, and CyberSense
- \* Avamar Virtual Edition (AVE), PowerProtect DD, and CyberSense

- \* Avamar, PowerProtect Data Manager, and DP Search
- \* DPA, NetWorker, and PowerProtect Data Manager

### NEW QUESTION 32

What should the solution architect used to determine a customer's CyberSense server requirements based on their environment?

- \* IndexEngines site
- \* Sizing Calculator
- \* Workload calculator
- \* Cyber Recovery product guide

### NEW QUESTION 33

A customer plans to have 1 policy which replicates data into the vault daily and takes a PIT copy, which is kept for 7 days and retention locked. The customer also plans to have one copy for the sandbox environment to use for testing.

How many MTrees exist on the PowerProtect DD in the Vault?

- \* 8
- \* 4
- \* 1
- \* 3

### NEW QUESTION 34

A customer is unable to deploy the CR Virtual Appliance. They currently use vCenter 6.5 and have 4 CPU, 8GB of memory, and 150GB of disk space available.

Why won't the virtual appliance deploy?

- \* Insufficient disk space
- \* Insufficient memory
- \* Unsupported vCenter version
- \* Insufficient CPU

### NEW QUESTION 35

What is the purpose of Denial of Service attacks?

- \* launch the attack from many other host machines
- \* bring down a system to initiate another attack
- \* encrypt the data for ransom
- \* affect the system by a business competitor

### NEW QUESTION 36

What are the possible connection states of the CR Vault?

- \* Acked, Unlocked, Unknown, Secured, and Downgraded
- \* Open, Locked, Secured, Promoted, and Unknown
- \* Degraded, Down, Up, Running, and Maintenance
- \* Locked, Unlocked, Unknown, Secured, and Degraded

### NEW QUESTION 37

What information is contained within the CR security guide?

- \* Licensing, code integrity, security patches, and malware protection
- \* Access control, log files, communication, and data security
- \* Data security, access control, and manual vault security
- \* Access control, log files, and manual vault security

### NEW QUESTION 38

By default, what is the only connection between the production PowerProtect DD and the CR Vault PowerProtect DD?

- \* Backup link
- \* Management link
- \* DD Boost link
- \* MTree replication link

### NEW QUESTION 39

What vault status is displayed if none of the PowerProtect DD systems in the CR Vault are able to communicate with the Cyber Recovery software?

- \* Unlocked
- \* Unknown
- \* Degraded
- \* Locked

### NEW QUESTION 40

What parameter is added to the command crsetup.sh to install Cyber Recovery on a VM?

- \* start
- \* run
- \* deploy
- \* install

### NEW QUESTION 41

What is the minimum number of Ethernet interfaces needed for Cyber Recovery?

- \* 4
- \* 3
- \* 1
- \* 2

### NEW QUESTION 42

What occurs when the CyberSense license expires?

- \* CR software will completely stop
- \* CR software will stop creating the PIT
- \* Analyze operation will continue with a warning
- \* Analyze operation fails

### NEW QUESTION 43

Which Cyber Recovery REST API section allows a user to create log bundles?

- \* Notifications
- \* Actions
- \* Systems
- \* Authentication

#### **NEW QUESTION 44**

A company has DP8300 in the production environment. They would like to use the CR Vault.

What is the most efficient solution to replicate data to the CR Vault?

- \* Replicate to DP8300 in the CR Vault to protect applications
- \* Replicate the MTree owned by Multi Node Avamar directly to the CR Vault PowerProtect DD
- \* Multi Nodes are not supported by Cyber Recovery, and data cannot be protected in the CR Vault PowerProtect DD
- \* Replicate data from Multi Node to Single Node, then replicate the MTree owned by single node to the CR Vault PowerProtect DD

#### **NEW QUESTION 45**

Which Cyber Recovery component is used to detect, diagnose, and accelerate recovery within the Vault?

- \* Secure Data Isolation
- \* Cyber Recovery Vault
- \* CyberSense
- \* Sandbox

**DEP-3CR1 dumps Free Test Engine Verified By It Certified Experts:**

<https://www.vceprep.com/DEP-3CR1-latest-vce-prep.html>]