


## PAM-DEF Study Guide Latest [May 12, 2023 Realistic Verified PAM-DEF Dumps [Q44-Q63]

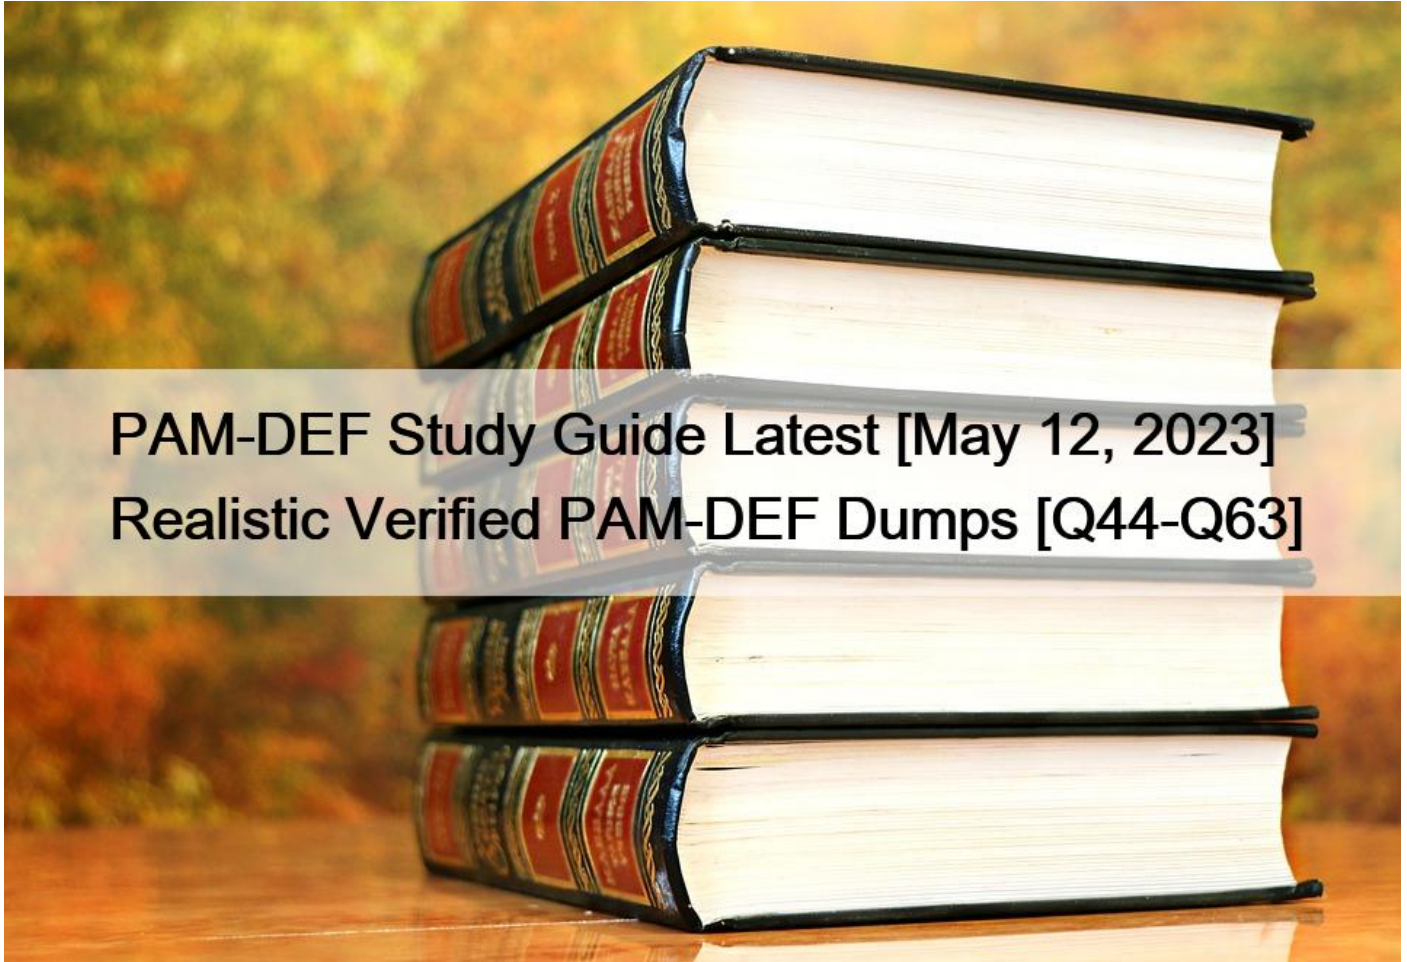

## PAM-DEF Study Guide Latest [May 12, 2023] Realistic Verified PAM-DEF Dumps [Q44-Q63]

PAM-DEF Study Guide: Latest [May 12, 2023] Realistic Verified PAM-DEF Dumps  
PAM-DEF Questions & Practice Test are Available On-Demand

### NEW QUESTION 44

If the AccountUploader Utility is used to create accounts with SSH keys, which parameter do you use to set the full or relative path of the SSH private key file that will be attached to the account?

- \* KeyPath
- \* KeyFile
- \* ObjectName
- \* Address

### NEW QUESTION 45

You want to generate a license capacity report.

Which tool accomplishes this?

- \* Password Vault Web Access
- \* PrivateArk Client
- \* DiagnoseDB Report
- \* RestAPI

#### **NEW QUESTION 46**

Via Password Vault Web Access (PVWA), a user initiates a PSM connection to the target Linux machine using RemoteApp. When the client's machine makes an RDP connection to the PSM server, which user will be utilized?

- \* Credentials stored in the Vault for the target machine
- \* Shadowuser
- \* PSMConnect
- \* PSMAdminConnect

#### **NEW QUESTION 47**

You are creating a Dual Control workflow for a team's safe.

Which safe permissions must you grant to the Approvers group?

- \* List accounts, Authorize account request
- \* Retrieve accounts, Access Safe without confirmation
- \* Retrieve accounts, Authorize account request
- \* List accounts, Unlock accounts

#### **NEW QUESTION 48**

In the screenshot displayed, you just configured the usage in CyberArk and want to update its password.

### Required Properties:

Address:	webserver1.lab.local
File Path:	C:\inetpub\wwwroot\web.config
XML Element:	/configuration/appSettings/add[@key="PASSWORD"]
Connection Type:	Windows File Sharing ▼

### Optional Properties:

<input type="checkbox"/> Port:	
<input checked="" type="checkbox"/> XML Attribute:	Value
<input checked="" type="checkbox"/> Password Regex:	(.*)
<input type="checkbox"/> Backup Password File:	[Select] ▼
<input type="checkbox"/> Usage Display Name:	

Disable automatic management for this account

Reason: No Reason

What is the least intrusive way to accomplish this?

- \* Use the **Change** button on the usage's details page.
- \* Use the **Change** button on the parent account's details page.
- \* Use the **Sync** button on the usage's details page.
- \* Use the **Reconcile** button on the parent account's details page.

### NEW QUESTION 49

One can create exceptions to the Master Policy based on \_\_\_\_\_.

- \* Safes
- \* Platforms
- \* Policies
- \* Accounts

### NEW QUESTION 50

Which of the following logs contains information about errors related to PTA?

- \* ITAlog.log
- \* diamond.log
- \* pm\_error.log

\* WebApplication.log

### NEW QUESTION 51

An auditor needs to login to the PSM in order to live monitor an active session. Which user ID is used to establish the RDP connection to the PSM server?

- \* PSMConnect
- \* PSMMaster
- \* PSMGwUser
- \* PSMAdminConnect

### NEW QUESTION 52

What is the name of the Platform parameters that controls how long a password will stay valid when One Time Passwords are enabled via the Master Policy?

- \* Min Validity Period
- \* Interval
- \* Immediate Interval
- \* Timeout

Explanation

Min Validity Period -The number of minutes to wait from the last retrieval of the password until it is replaced.

This gives the user a minimum period to be able to use the password before it is replaced. Use -1 to ignore this property. This parameter is also used to release exclusive accounts automatically Interval -The number of minutes that the Central Policy Manager waits between running periodic searches for the platform. Note: It is recommended to leave the default value of 1440. If a change/verify policy has been configured, the Central Policy Manager will automatically align the periodic searches with the start of the defined timeframes.

### NEW QUESTION 53

Within the Vault each password is encrypted by:

- \* the server key
- \* the recovery public key
- \* the recovery private key
- \* its own unique key

### NEW QUESTION 54

What is the purpose of the HeadStartInterval setting in a platform?

- \* It determines how far in advance audit data is collected for reports
- \* It instructs the CPM to initiate the password change process X number of days before expiration.
- \* It instructs the AIM Provider to skip the cache; during the defined time period
- \* It alerts users of upcoming password changes x number of days before expiration.

Explanation

The number of days before the password expires (according to the ExpirationPeriod parameter) that the CPM will initiate a password change process. This parameter is not relevant if the policy will be applied to a member of an account group.

### NEW QUESTION 55

To use PSM connections while in the PVWA, what are the minimum safe permissions a user or group will need?

- \* List Accounts, Use Accounts
- \* List Accounts, Use Accounts, Retrieve Accounts
- \* Use Accounts
- \* List Accounts, Use Accounts, Retrieve Accounts, Access Safe without confirmation

#### NEW QUESTION 56

A Logon Account can be specified in the Master Policy.

- \* TRUE
- \* FALSE

#### NEW QUESTION 57

The Privileged Access Management solution provides an out-of-the-box target platform to manage SSH keys, called UNIX Via SSH Keys.

How are these keys managed?

- \* CyberArk stores Private keys in the Vault and updates Public keys on target systems.
- \* CyberArk stores Public keys in the Vault and updates Private keys on target systems.
- \* CyberArk does not store Public or Private keys and instead uses a reconcile account to create keys on demand.
- \* CyberArk stores both Private and Public keys and can update target systems with either key.

#### NEW QUESTION 58

In a default CyberArk installation, which group must a user be a member of to view the `/reports` page in PVWA?

- \* PVWAMonitor
- \* ReportUsers
- \* PVWAReports
- \* Operators

#### NEW QUESTION 59

Which Automatic Remediation is configurable for a PTA detection of a `Suspected Credential Theft`?

- \* Add to Pending
- \* Rotate Credentials
- \* Reconcile Credentials
- \* Disable Account

#### NEW QUESTION 60

Which usage can be added as a service account platform?

- \* Kerberos Tokens
- \* IIS Application Pools
- \* PowerShell Libraries
- \* Loosely Connected Devices

#### NEW QUESTION 61

What is the purpose of the CyberArk Event Notification Engine service?

- \* It sends email messages from the Central Policy Manager (CPM)
- \* It sends email messages from the Vault
- \* It processes audit report messages
- \* It makes Vault data available to components

#### **NEW QUESTION 62**

Accounts Discovery allows secure connections to domain controllers.

- \* TRUE
- \* FALSE

#### **NEW QUESTION 63**

In the Private Ark client, how do you add an LDAP group to a CyberArk group?

- \* Select Update on the CyberArk group, and then click Add > LDAP Group
- \* Select Update on the LDAP Group, and then click Add > LDAP Group
- \* Select Member Of on the CyberArk group, and then click Add > LDAP Group
- \* Select Member Of on the LDAP group, and then click Add > LDAP Group

**Valid PAM-DEF Exam Dumps Ensure you a HIGH SCORE:** <https://www.vceprep.com/PAM-DEF-latest-vce-prep.html>