


## Oct-2023 Free SAP C-CPI-15 Exam Question Practice Exams [Q28-Q42]

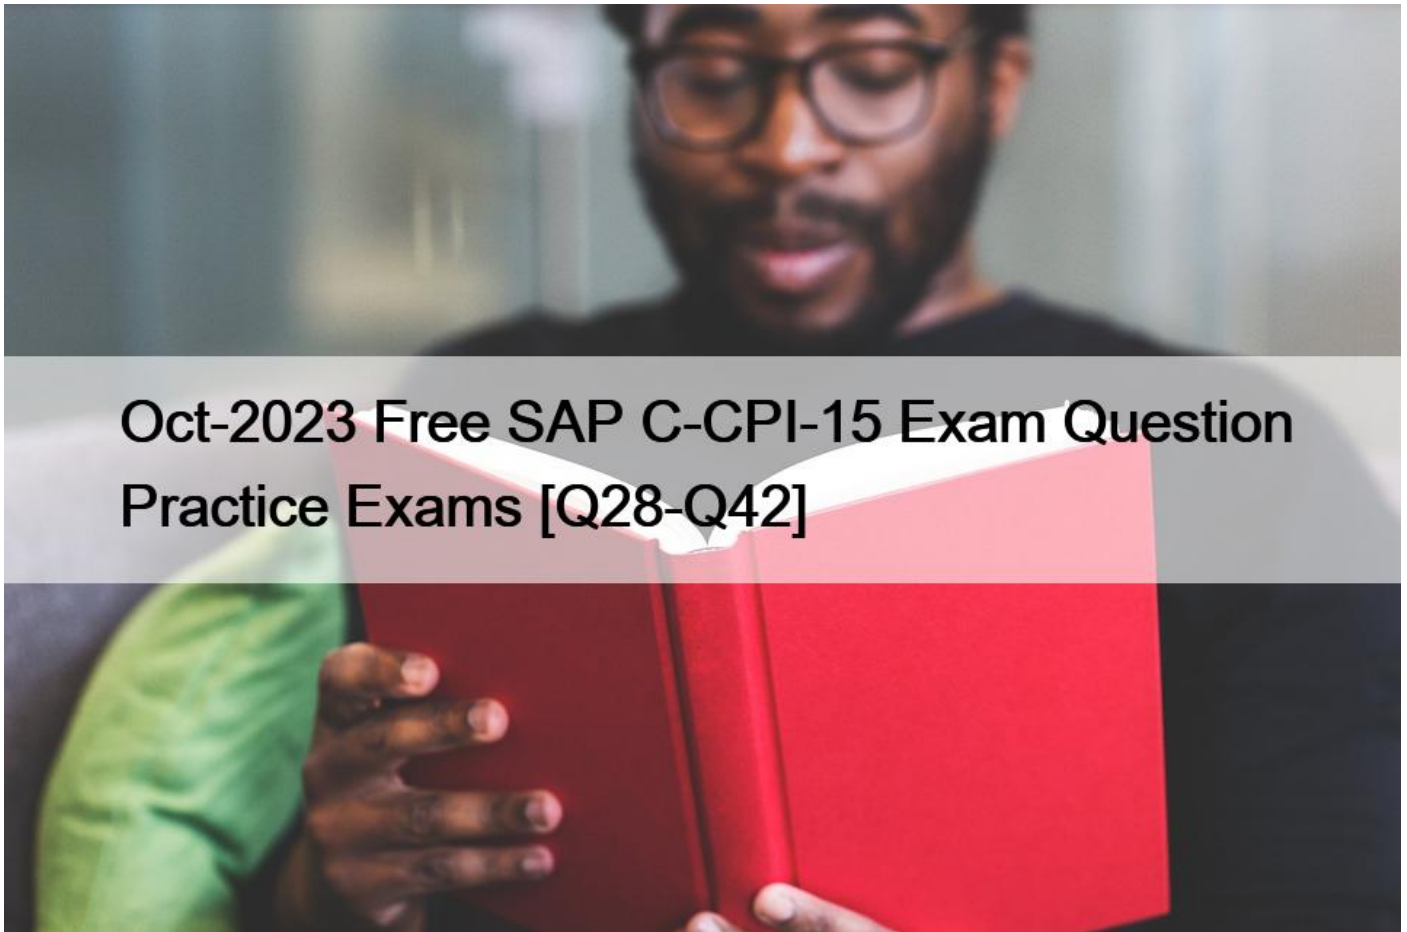

### Oct-2023 Free SAP C-CPI-15 Exam Question Practice Exams Ace C-CPI-15 Certification with 62 Actual Questions Q28.

Where must you configure an HTTPS inbound adapter with OAuth 2.0 authentication?

- \* In the adapter
- \* In the integration flow
- \* In the SAP Integration Suite
- \* In the process runtime

**Q29.** When does the 'Trace' log level expire and when will the log files be removed?

- \* Expiration. 10 minutes Removal. After 24 hours
- \* Expiration: 15 minutes Removal: After 24 hours
- \* Expiration: 15 minutes Removal: After 10 hours
- \* Expiration: 10 minutes Removal: After 1 hour

**Q30.** In a Content Modifier, you want to set up a call to the message body of the previous Content Modifier. Which notation do you use to implement this?

- \* S(inbody)
- \* S[bodyin]
- \* S{in body}

\* S{body.in}

**Q31.** What is Representational State Transfer (REST)?

- \* An architectural style
- \* A description language for APIs
- \* A message protocol
- \* An application protocol

**Q32.** You want to send messages over an SOAP adapter to an integration flow. Which method do you use to send the messages?

- \* UPDATE
- \* PATCH
- \* GET
- \* POST

**Q33.** You want to publish a new API product to the API business hub enterprise. What is a requirement?

- \* At least two deployed API Providers
- \* At least one deployed API Proxy
- \* At least one deployed API Provider
- \* At least two deployed API Proxies

**Q34.** What can you use to prevent overload in an OData request and reply call?

- \* Query filter
- \* HTTP adapter
- \* Stop parameter
- \* Paging

**Q35.** You want to dispatch messages only when a child element `<Product>` exists. Which condition do you set?

- \* `ProductSet/count(Product)>0`
- \* `/ProductSet/count(Product)=0`
- \* `/ProductSet/count(Product)<0`
- \* `/ProductSet/counter(Product)>0`

**Q36.** In the SAP Integration Suite, where can you change the virtual host name?

- \* Discover `<APIs>`
- \* Design APIs
- \* Configure `<APIs>`
- \* Settings APIs

**Q37.** What does an API consumer do?

- \* It provides the server-side implementation of an interface.
- \* It invokes an interface.
- \* It provides an interface.

**Q38.** You want to build an architecture that is largely asynchronous. Which design do you use to exchange notifications between the partners involved?

- \* Event-driven design
- \* Hexagonal design
- \* Serverless design
- \* Request-driven design

**Q39.** You are using a Data store Operation of the type Write. Which parameter must you select to avoid duplicate entries?

- \* Overwrite Existing Message
- \* Retention Threshold for Alerting
- \* Include Message Headers
- \* Encrypted stored Message

**Q40.** You use an outbound HTTP adapter with basic authentication. In SAP Integration Suite, Monitor Integrations Manage Security, where must you set up and store a user and password?

- \* Security Material
- \* Access policies
- \* PGP Keys
- \* Keystore

**Q41.** What are some message protocols that the API Management capability within SAP Integration Suite supports? Note: There are 3 correct answers to this question.

- \* SOAP
- \* RFC
- \* REST
- \* OData
- \* IDoc

**Q42.** You configured a content modifier as follows: Action Create. Name: ProductID. Source Type: XPath.

Source Value: //ProductID. Data Type: java lang string. After testing the content modifier, you receive an error message that contains the following fragment: java.lang.ClassNotFoundException java lang string.

What caused the error message?

- \* Incorrect name
- \* Incorrect source value
- \* Incorrect source type
- \* Incorrect data type

**C-CPI-15 Questions PDF [2023 Use Valid New dump to Clear Exam: <https://www.vceprep.com/C-CPI-15-latest-vce-prep.html>]**